



BLOCK - 1 TYPICAL FLOOR PLAN

Super Built Up Area	Built Up Area	Common Area	Carpet Area
1640 SFT	1282 SFT	358 SFT	1128 SFT
1670 SFT	1307 SFT	363 SFT	1128 SFT



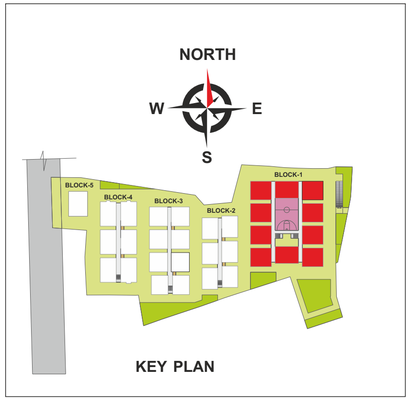

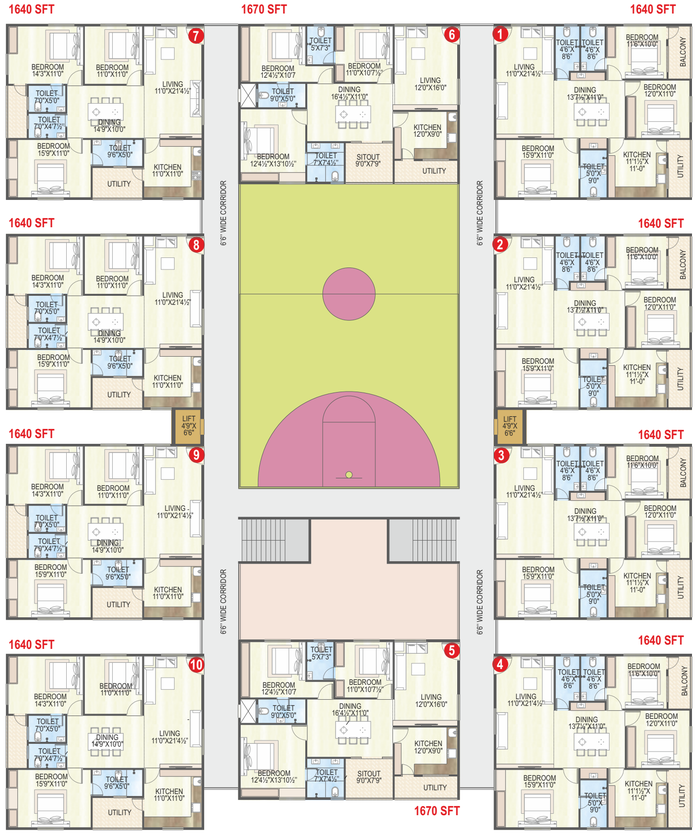


BLOCK - 2

TYPICAL FLOOR PLAN



Super Built Up Area	Built Up Area	Common Area	Carpet Area
1435 SFT	1124 SFT	311 SFT	985 SFT
1400 SFT	1095 SFT	305 SFT	930 SFT

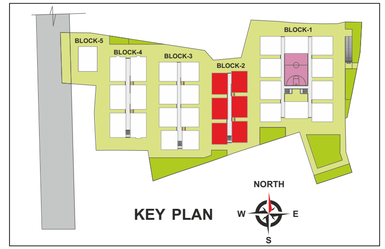






BLOCK - 3

TYPICAL FLOOR PLAN



Super Built Up Area	Built Up Area	Common Area	Carpet Area
1460 SFT	1142 SFT	318 SFT	992 SFT
1350 SFT	1056 SFT	294 SFT	910 SFT

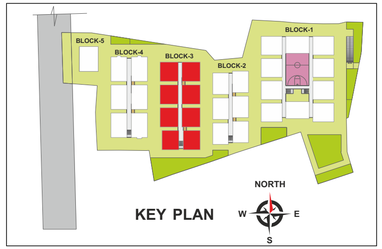






BLOCK - 4

TYPICAL FLOOR PLAN



Super Built Up Area	Built Up Area	Common Area	Carpet Area
1640 SFT	1283 SFT	357 SFT	1111 SFT

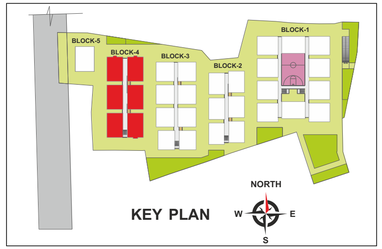




BLOCK - 5 TYPICAL FLOOR PLAN

Super Built Up Area	Built Up Area	Common Area	Carpet Area
1645 SFT	1287 SFT	358 SFT	1104 SFT



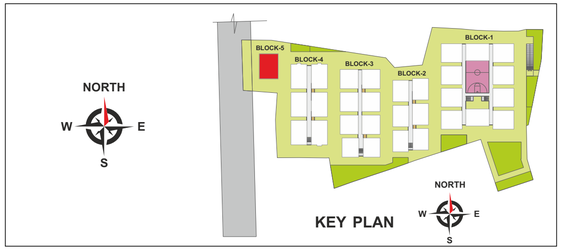

1645 SFT



Specifications

Foundation: Earthquake - resistant reinforced cement concrete framed structure as per seismic Zone.

Super Structure: 6" Thick table moulded brick for external walls and 4" for internal walls.

Painting
External walls with two coats of acrylic emulsion, internal walls with putty finish and acrylic emulsion paint over a coat of primer of Asian / Dulux or equivalent

Doors & Windows
Main Door: Main Door with best Teakwood frame and shutter aesthetically designed with polishing. Internal doors with well seasoned wood frame with company made flush shutters.
French Door: UPVC / Powder coated aluminum doors.
Windows: UPVC / Powder coated Aluminum

Kitchen
Granite platform with stainless sink with both Municipal and borewell water connections and provision for fixing water purifying system. Glazed ceramic tile dado upto 2" height above kitchen platform

Flooring
800 X 800 mm vitrified tiles in living, dining, kitchen and bedrooms, 600 X600 mm Anti-skid vitrified tiles in balconies (Icon, Itaka, Kajaria, Johnson or equivalent make

Bathrooms and Toilets:
a. WC with flush tank of Hindustan / Jaquar / Hindware or equivalent
b. Hot and cold mixer with shower
c. Provision for geysers in toilets
d. Ceramic and non-slippery tiles for flooring
e. Glazed ceramic tiles dado upto 7' height
f. All fittings are chrome plated of Jaquar or equivalent

Electrical
Concealed wiring of Finolex / RR / Havells or equivalent of fire retardant in conduits for lights, fans, plug and power plug points of branded make
a. Power outlets for air-conditioners in all bedrooms
b. Power outlets for geysers in all bathrooms
c. Power plug for cooking range chimney, refrigerator, microwave oven, mixer / grinder in kitchen
d. Plug points for TV in living and master bedrooms
e. 3-Phase supply for each unit and individual meter boards
f. All electrical fittings of Pointer Italia / Anchor / Legrand or equivalent make.

Telecom:
Telephone points in master bedroom and living rooms.

Cable TV
Provision for cable in master bedroom and living room

Generator
DG set back-up with acoustic enclosure to common areas and limited back-up to all flats at cost

Security System
CC cameras at entrance lobby and lift areas. Intercom facility to connect and communicate with all apartments

Lift
Sufficient number of lifts provided with Kone/ Johnson / Schindler / Otis or equivalent make

Parking
Will be provided in cellar flooring

Note: Any location changes in A/C outdoor and indoor units and elevation changes will not be allowed. Outside grills for balconies are not allowed.